

Lift & Shift 1KL - 6 KL

BAFFLED TANKS , 110% SELF BUNDED




Baffled
Can be transported full of fuel



Storage and Dispensing of Diesel, Lubricants,
Kerosene, Petrol & Waste Oil



Culus Listed, tested to UL requirements

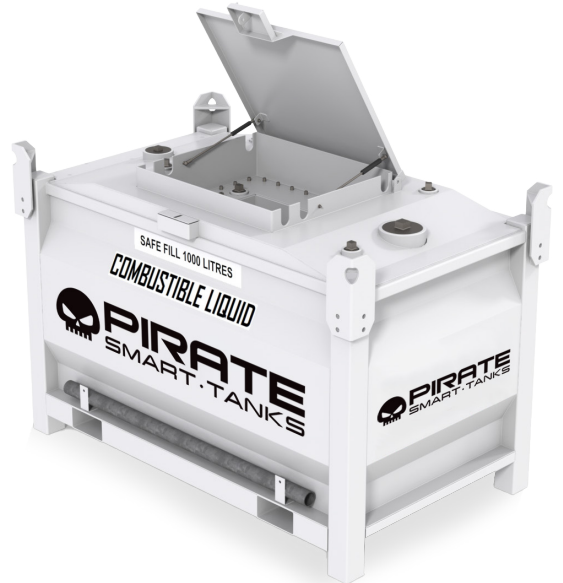

Smarter Fuel Cells

- 100% self banded The outer tank will hold 110% of the inner tank's capacity
- Removable lid for ease of maintenance.
- UN31A/Y approved for the transport of Dangerous Goods by Road, Rail and Sea, Packaging Groups II & III.

Safer Fuel Cells

- Secure hose entry and vexit ports.
- Tank can feed and return from up to 3 generators at once.
- 4 x way forklift pockets.
- Mechanical contents gauge.
- Generator hose suction and return points.
- Supplied with all required statutory decals.

Adaptable Fuel Cells


- Fully certified Crane Lifting Lugs, and can be transported and lifted when full of liquid.
- Stackable - 3-high empty and 2-high when full.
- Pumps, connections and hoses are housed and can be locked within the bund, even in use.
- Fully lockable lid on gas struts.

Specifications


Size	Safe FILL Level	Lenght (mm)	Width (mm)	Height (mm)	Empty Weight (kg)	Full Weight (kg)
LS 1	1000L	1577	1132	1235	680	1680
LS 2	1800L	2550	1130	1235	980	2680
LS 3	2700L	3630	1130	1235	1139	3840
LS 4	4100L	3000	2000	1235	1650	5175
LS 6	5950L	3560	2166	1235	2450	7205

Lift & Shift 1KL - 6 KL


Models




X1100




X2000



X3000



X4500




X6300

Certifications

• Unique tank in tank design approved to UL142 / ULCS601 / ULCS603 / AS1940, AS1692 / BS799 / PPG2.

Configuration

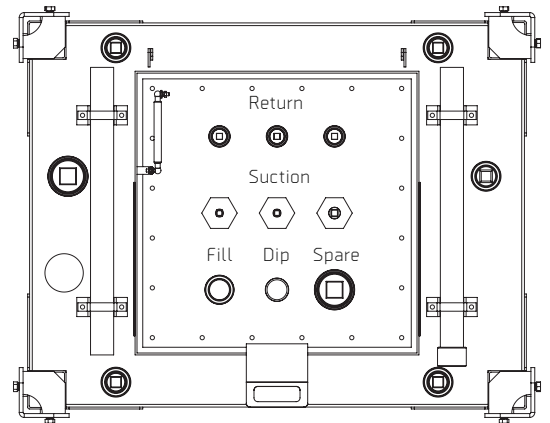

TYPICAL INNE TANK CONFIGURATIONS

Option Configurations

- PIUSI Cube70 Transfer Pump
- Waste Oil Configuration