



purple
cube

purple
pod

Purple
H2

RENEWABLE RANGE SPECS

purple cube

Technical Specifications



100%
Solar Capable



800kwh
Energy Storage



400kw
Diesel Backup



Fully programmable,
remotely monitored
inverters

PC Range

The Purple CUBE is a class leading range of hybrid Battery Energy Storage Systems designed to deliver renewable energy to larger construction and mining applications. Our standard range of 100kw/h and 400kw/h Purple CUBES can deliver up to 1600kw/h of energy per day to your site. Purple CUBES are fitted with multi-voltage charge inputs and can receive energy from multiple sources separately or concurrently. From solar, to wind, hydrogen to bio diesel, Purple CUBES can also be charged using mains power and diesel generators. Even without renewable energy input, a Purple CUBE can optimise your diesel generator, storing it's inefficient and unused mechanical energy for later use and reducing diesel operation from 24 hours per day down to between zero and 4 hours.



PC 100-200

Output Power	100kW	Battery Storage	200.7kWh
Output Voltage	400V@50Hz,3ph.	Weight	4100kg

Operating Temp	Cell Type	Pack Model	Pack Capacity	Cyclic Life	Charge Current	Voltage Of Rack
-20 to 50	LFP(LiFePO4)	MF51280	14.336kWh	6000(0.5C@90%-DOD)	140A(0.5C)	716.8VDC



PC 30-60

Output Power	30kW	Battery Storage	61.44kWh
Output Voltage	400V@50Hz,3ph.	Weight	1700kg

Operating Temp	Cell Type	Pack Model	Pack Capacity	Cyclic Life	Charge Current	Voltage Of Rack
-20 to 50	LFP(LiFePO4)	MF51100	5.12kWh	4000(0.5C@90%-DOD)	50A(0.5C)	614.4VDC



PC 250-400

Output Power	250kW	Battery Storage	401.4kWh
Output Voltage	400V@50Hz,3ph.	Weight	6800kg

Operating Temp	Cell Type	Pack Model	Pack Capacity	Cyclic Life	Charge Current	Voltage Of Rack
-20 to 50	LFP(LiFePO4)	MF51280	14.336kWh	6000(0.5C@90%-DOD)	140A(0.5C)	716.8VDC



PC 50-100

Output Power	50kW	Battery Storage	100.35kWh
Output Voltage	400V@50Hz,3ph.	Weight	2100kg

Operating Temp	Cell Type	Pack Model	Pack Capacity	Cyclic Life	Charge Current	Voltage Of Rack
-20 to 50	LFP(LiFePO4)	MF51280	14.336kWh	6000(0.5C@90%-DOD)	140A(0.5C)	358.4VDC



PC 500-1000

Output Power	500kW	Battery Storage	1003.5kWh
Output Voltage	400V@50Hz,3ph.	Weight	18000kg

Operating Temp	Cell Type	Pack Model	Pack Capacity	Cyclic Life	Charge Current	Voltage Of Rack
-20 to 50	LFP(LiFePO4)	MF51280	14.336kWh	6000(0.5C@90%-DOD)	140A(0.5C)	716.8VDC

purple pod


Technical Specifications



 2kW
Solar Capable

 60kw/h
Energy Storage

 30kVA
Diesel Backup

 Fully programmable,
remotely monitored
inverters



POD 10

Output Power	10 kVA
Weight	2319kg
Prime Power	10 kVA
Expanded Dimensions	2928 x 5400 x 3350mm
Loading Dimensions	2928 x 1150 x 2350mm

Solar Panel Specs

Maximum Power	460W	Max-Power Voltage (Vm)	41.96VDC
Power Tolerance	0~+5W	Max-Power Current (Im)	13.11A
		Qty	5pcs

Battery Panel Specs

Cell Type	LFP(LiFePO4)	Discharge Depth	90%
Pack Model	MF51100D	Charger Current	97.7 A(1.0C)
Pack Capacity	5 kWh	Battery Rack Voltage	43.2V~59V
Pack Rated Voltage	51.2 VDC	Rated Cycle Life	>2000 80% DOD

Generator Specs

Fuel Consumption	2.6 L/h@100% load	Fuel Tank Capacity	36 hours
		Fuel Type	Diesel(Nature Gas Engine for option)

Hybrid Inverter Specs

Solar Controller	MPPT*2	Max.Conversion Efficiency	97.6%
AC Voltage Range	380~415Vac	Rated Output Power	10kW (0.8leading~0.8lag-ging)
Max.Charge/Discharge Current	210A	EMS	-
Max.PV Current	26A*2		



POD 20

Output Power	20 kVA
Weight	2614kg
Prime Power	20 kVA
Expanded Dimensions	2928 x 5400 x 3350mm
Loading Dimensions	2928 x 1150 x 2550mm

Solar Panel Specs

Maximum Power	460W	Max-Power Voltage (Vm)	35.16VDC
Power Tolerance	0~+5W	Max-Power Current (Im)	13.08A
		Qty	5pcs

Battery Panel Specs

Cell Type	LFP(LiFePO4)	Discharge Depth	90%
Pack Model	MF51150A	Charger Current	135 A(1.0C)
Pack Capacity	7.7 kWh	Battery Rack Voltage	43.2V~59V
Pack Rated Voltage	51.2 VDC	Rated Cycle Life	>2000 80% DOD

Generator Specs

Fuel Consumption	5.5 L/h@100% load	Fuel Tank Capacity	18 hour Bunded Fuel Tank
		Fuel Type	Diesel(Nature Gas Engine for option)


Hybrid Inverter Specs

Solar Controller	MPPT*4	Max.Conversion Efficiency	97.6%
AC Voltage Range	380~415Vac	Rated Output Power	20kW (0.8leading~0.8lag-ging)
Max.Charge/Discharge Current	210A*2	EMS	-
Max.PV Current	26A*4		


Purple H2

Technical Specifications

 40,000hr
Operating Life

 16%
More Fuel Efficient

 100%
AUS/NZ Compliant

 Proudly made in
Brisbane

Hydrogen trials now available

For more information on our Hydrogen generators, please contact your Premiair Hire account representative.



H2 30

Net Continuous Power	30KW
Cruise Mode Fuel Consumption	0.78kg/hr
Cruise Mode Power	15KW
Net Cruise Mode Efficiency	58%
Output Voltage Range	115VDC-235VDC
Maximum Current	300A
Hydrogen Fuel Supply Pressure	8.5 bara
Ambient Operating Temperature Range	-30C - 50C

H2 50

Net Continuous Power	50KW
Cruise Mode Fuel Consumption	1.39kg/hr
Cruise Mode Power	25KW
Net Cruise Mode Efficiency	54%
Output Voltage Range	180VDC-360VDC
Maximum Current	350A
Hydrogen Fuel Supply Pressure	8.5 bara
Ambient Operating Temperature Range	-30C - 50C



Modoken is a proprietary software system for measuring carbon and other key environmental metrics in off grid energy systems. Modoken can be used in a variety of ways including establishing a budget around carbon or cost for a machine, site or entire fleet and delivering behavioural driving metrics and insights into improvement opportunities.

01

CONSUMPTION

Modoken will measure the kilowatt hour consumption of your machine, site or fleet, factoring in variables around your source energy, delivering a true measure of how much energy you are using and where that energy is coming from.

02

COST

Modoken can be used to develop entire energy cost budgets and will deliver a per kw/h cost assessment for your machine, site or fleet. Modoken also has a "what if?" function that allows you to measure what your costs would be if you replaced your existing energy with alternative sources.

03

CARBON

Blended carbon consumption, scope 1 and 2 emissions and performance against carbon reduction targets are the bread and butter for Modoken. The large amount of variables that go into understanding your machine, site or fleets net zero journey and delivering accurate reporting is the whole reason Modoken was developed in the first place.

04

CONTROL

Modoken also enables you to remotely see, monitor and control your energy assets. Anything from load behaviour to preventative maintenance, refuelling scheduling and safety can be monitored and controlled using the Modoken system on your energy asset.



Easy To Understand Data Delivered Directly To your Phone or Computer. Via The Modoken App.

Consumption
438 KW/H





Cost




Carbon
65% ↓



Control

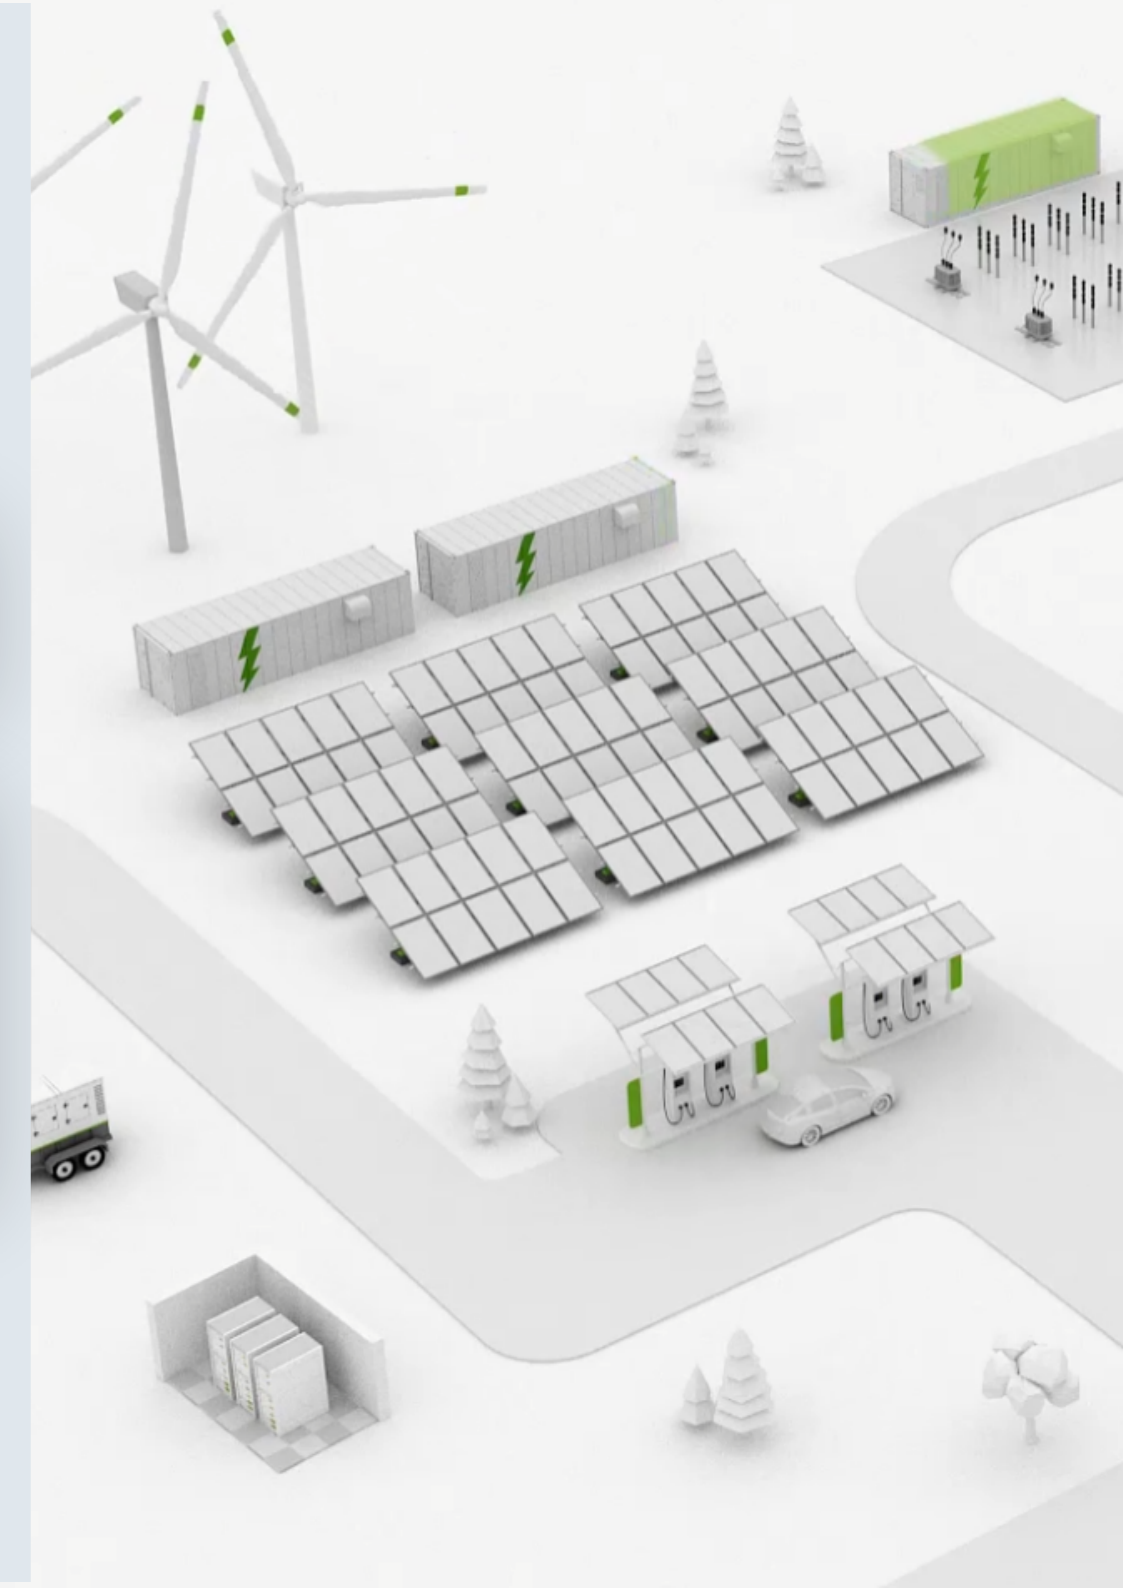

Product Range

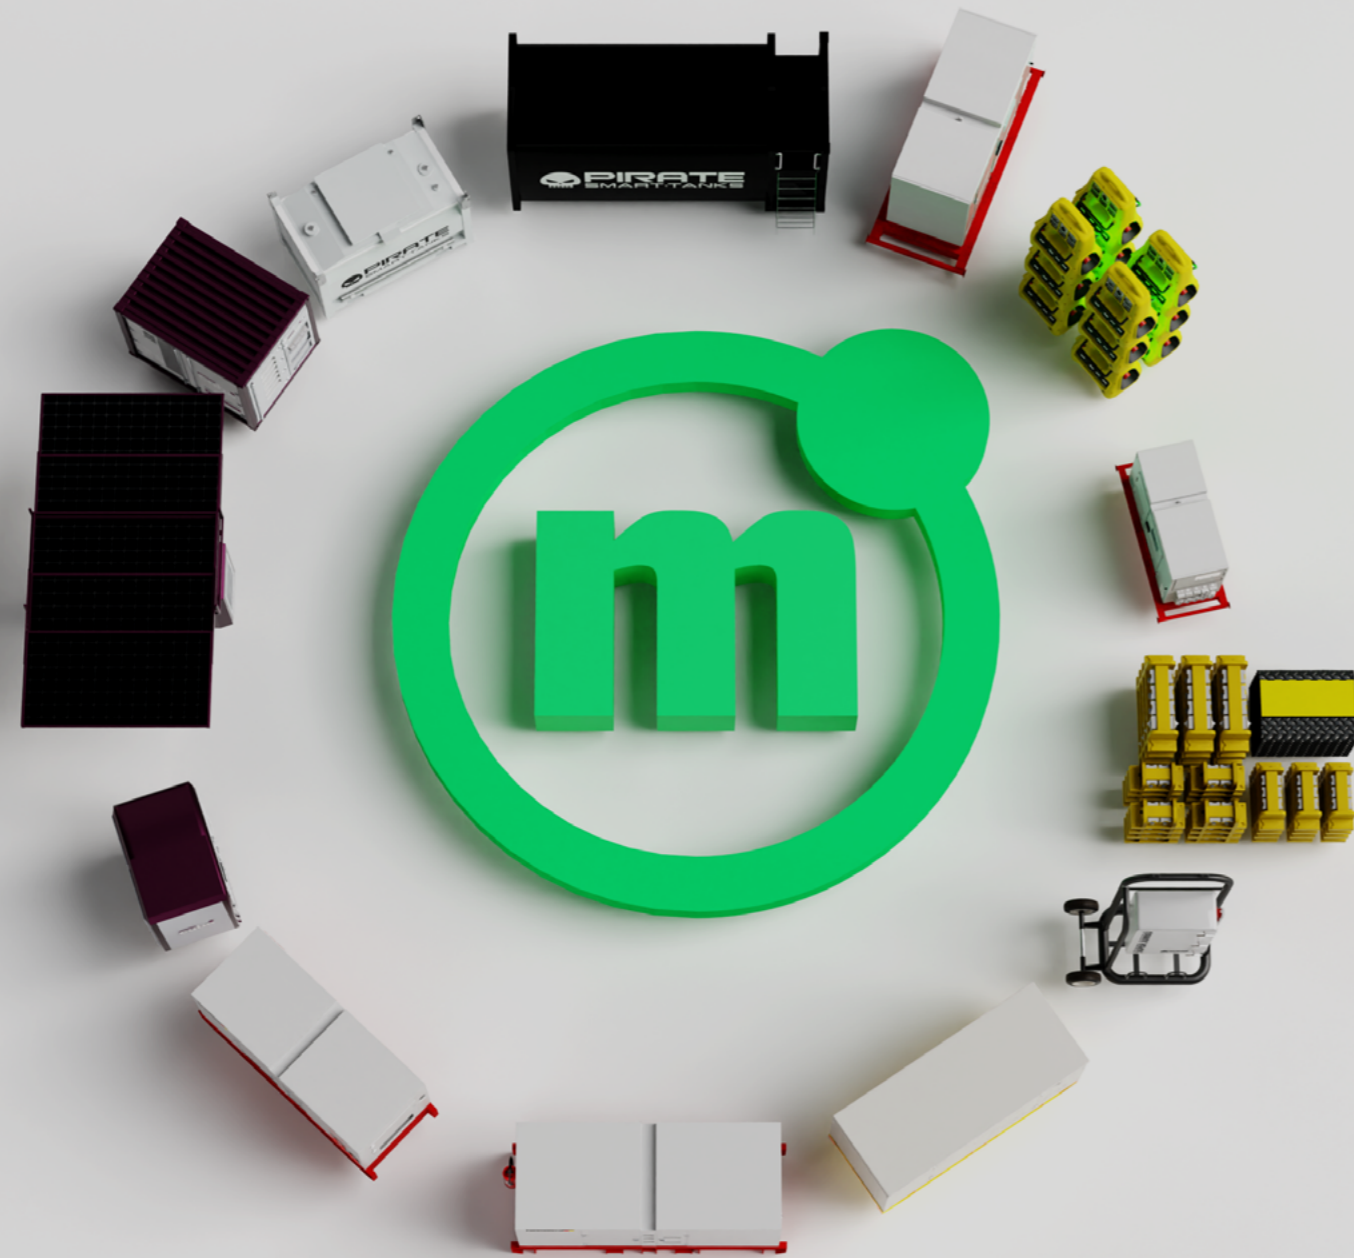

LS



Lift & Shift

SS



Static Storage

TT



Tow tanks



XL



XL SERIES

BT



XL AND WH

WH



WHISPER



FT



Lift & Shift

FMP



Static Storage

FT FMP



CONTAINERS



POD



Purple Pod

DC



Purple Cube

H2



Hydrogen



HS



Handheld Range

JUMBO



Midsize Distribution

SI



Hardwire

Purple
H2

purple
cube

purple
pod



SPEC SHEET RANGE