



## Range Specs

LS + SS + TT

## Lift & Shift 1KL - 6 KL

**BAFFLED TANKS , 110% SELF BUNDED**



Baffled  
Can be transported full of fuel



Storage and Dispensing of Diesel, Lubricants,  
Kerosene, Petrol & Waste Oil



UL Listed, tested to UL requirements

### Smarter Fuel Cells

- 100% self banded The outer tank will hold 110% of the inner tank's capacity

- Removable lid for ease of maintenance.

- UN31A/Y approved for the transport of Dangerous Goods by Road, Rail and Sea, Packaging Groups II & III.

### Safer Fuel Cells

- Secure hose entry and vexit ports.
- Tank can feed and return from up to 3 generators at once.

- 4 x way forklift pockets.
- Mechanical contents gauge.

- Generator hose suction and return points.
- Supplied with all required statutory decals.

### Adaptable Fuel Cells

- Fully certified Crane Lifting Lugs, and can be transported and lifted when full of liquid.

- Stackable - 3-high empty and 2-high when full.

- Pumps, connections and hoses are housed and can be locked within the bund, even in use.
- Fully lockable lid on gas struts.



| Size | Safe Fill Level | Length (mm) | Width (mm) | Height (mm) | Empty Weight (kg) | Full Weight (kg) |
|------|-----------------|-------------|------------|-------------|-------------------|------------------|
| LS 1 | 1000L           | 1577        | 1132       | 1235        | 680               | 1680             |
| LS 2 | 1800L           | 2550        | 1130       | 1235        | 980               | 2680             |
| LS 3 | 2700L           | 3630        | 1130       | 1235        | 1139              | 3840             |
| LS 4 | 4100L           | 3000        | 2000       | 1235        | 1650              | 5175             |
| LS 6 | 5950L           | 3560        | 2166       | 1235        | 2450              | 7205             |

## Lift & Shift 1KL - 6 KL



X1100




X2000



X3000



X4500




X6300

### Certifications

- Unique tank in tank design approved to UL142 /ULCS601 / ULCS603 / AS1940, AS1692 / BS799 /PPG2.

### Configuration

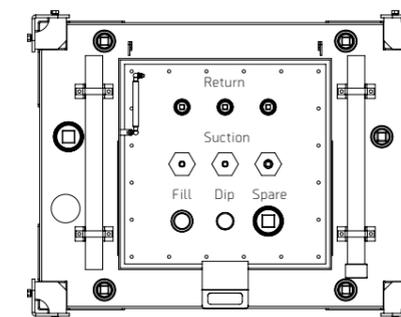

TYPICAL INNE TANK CONFIGURATIONS

### Option Configurations

- 70LPM Transfer Pump
- Waste Oil Configuration



## Static Storage 8KL - 75 KL

**CONTAINERISED , SELF BUNDED (DOUBLE WALL)**



Containerised Fully Bunded (Double Wall)



Storage and Dispensing of Diesel, Lubricants, Kerosene, Petrol & Waste Oil



Culus Listed, tested to UL requirements

### Smarter Fuel Cells

Unique rounded rectangular tank profile maximises the storage capacity of the tank and provides the strength of a cylindrical design. CSC plated as 10ft / 20ft / 40ft / 48ft Standard Container. Lockable Container Doors with option for Roller Door. Supplied with all required statutory safety decals for your region of operation.

### Safer Fuel Cells

Integrated Bunded Pump Bay and Tank Access Platform design providing the full tank functionality in one convenient location on the tank. Vent that will relieve the gap between the two tanks in the event of a fire

### Adaptable Fuel Cells

Full under tank visibility allows for regular visual inspect of the tank base and prevents the base rusting by providing for unrestricted air flow under the tank. 2 x 600mm manways with integrated tankaccess ladder assembly. Removable plate to allow the linking of multipl tanks in tank farm applications. Dispensing Equipment housed within a lockable bunded pump bay housing.




### Specifications

| Size  | Capacity | Safe Fill Level | Lenght (mm) | Width (mm) | Height (mm) | Empty Weight (kg) | Container Footprint | Integrated Pump Bay |
|-------|----------|-----------------|-------------|------------|-------------|-------------------|---------------------|---------------------|
| SS 8  | 8,000L   | 7700L           | 4600        | 2246       | 1235        | 2880              | -                   | No                  |
| SS 10 | 10,000L  | 9000L           | 5750        | 2108       | 1210        | 3500              | -                   | No                  |
| SS 12 | 12,000L  | 10,100L         | 3,000       | 2,438      | 2,896       | 4,500             | 10FT High Cube      | Yes                 |
| SS 16 | 16,000L  | 15,000L         | 3,000       | 2,438      | 2,896       | 4,500             | 10FT High Cube      | No                  |
| SS 30 | 30,000L  | 26,500L         | 6,058       | 2,438      | 2,896       | 7,500             | 20FT High Cube      | Yes                 |
| SS 38 | 38,000L  | 33,500L         | 6,058       | 2,438      | 2,896       | 7,500             | 20FT High Cube      | No                  |
| SS 65 | 65,000L  | 62,300L         | 12,192      | 2,438      | 2,896       | 14,500            | 40FT High Cube      | Yes                 |
| SS 75 | 75,000L  | 69,000L         | 12,192      | 2,438      | 2,896       | 14,500            | 40FT High Cube      | No                  |

## Static Storage 8KL - 75 KL



SS 8



SS 10



SS 12



SS 16



SS 30



SS 38



SS 65



SS 75

### DN80

DN80 Fill Point c/w Camlock Male Fitting / Dust Cap / Fire Safe Full Bore Ball Valve / Wafer Style Non Return Valve. DN80 Suction Outlet c/w Anti Syphon Valve and Two Piece Full Bore Fire Safe Ball Valve. DN80 Mechanical Overfill Valve + 12V Battery Operated Overfill Alarm.

### Certifications

- Certificate of Compliance#20120912-MH49221 for UL 142, ULC-S601.
- Decals manufactured to comply with AS1319 and AS2700.
- Fold out AS1657 designed and approved access ladder.

### Paint

Paint Colour RAL9003 Signal White/ Tanks are sandblasted to SA2 Standard. Hempel Marine Paint 3 Stage process. Primer Hempadur 1530. 2nd Coat Hempadur HiBuild 4520. Final Coat Hemptthane Enamel 55100 Finished dry



## Tow Tanks 1,250L - 2,000L

**SELF BUNDED (DOUBLE WALL), REGISTERED**



Containerised Fully Banded (Double Wall)



Storage and Dispensing of Diesel, Lubricants, Kerosene, Petrol & Waste Oil



UL Listed, tested to UL requirements

### Low Profile Trailers


This innovative self banded trailer range meets the requirements of the Mining, Civil Construction, Hire Industry and General Industrial Markets. A low profile, low centre of gravity, aerodynamic style trailer to deliver a smooth, safe towing experience..

### Safer Fuel Cells

- True self banded, tank in tank design. The inner tank can be removed from the outer tank for long term testing, cleaning and maintenance.
- Tank module can be removed for maintenance.
- Bunded Lockable Pump Bay Housing.
- Tank fueling area features mechanical level gauge, numerous spare ports for connection of support equipment, anti static fill tube and weatherproof recessed housing.

### Adaptable Fuel Cells

Meets requirements for towing of fuel in accordance with Australia Dangerous Goods Transport regulations. For hire company applications or stationary equipment connection requirements (such as generators, lighting towers, pumps etc). We provide 2 x suction connection (with foot valves) points and 2 x return connection points located at the rear of the trailer for simple / quick connection to site equipment.

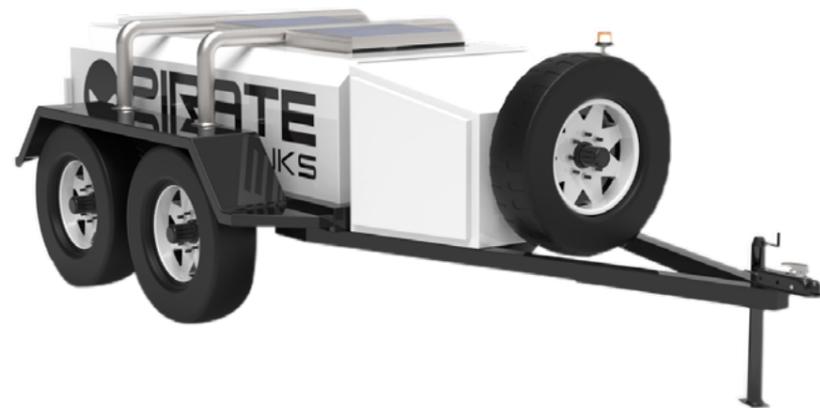

## Specifications

| Size     | Capacity | Lenght (mm) | Width (mm) | Height (mm) | Empty Weight (kg) | Registered | Brake system | Amber Light |
|----------|----------|-------------|------------|-------------|-------------------|------------|--------------|-------------|
| TT 1,250 | 1,080L   | 4565        | 1839       | 1210        | 1300kg            | Yes        | Mechanical   | 12V DC      |
| TT 2,000 | 2,000L   | 4565        | 1839       | 1629        | 1300kg            | Yes        | Electrical   | 12V DC      |

## Lift & Shift 1KL - 6 KL




TT 1250



TT 1250

### Options Available

Solar Panel Fire extinguisher, wheel chocks and stainless steel brackets, reflective tape, wheel nut indicators.

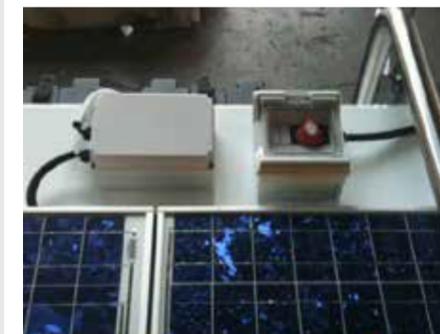

# PRODUCT RANGE:



**FUCHTARDT**

## GENERATORS 6KVA - 1500KVA



**ASTON ELECTRIC**



**PIRATE SMART-TANKS**

## FUEL CELLS 1KL - 100KL



**SUMO PLUG N PLAY GEAR**

## DISTRIBUTION 10A - 1000A



**purple**

## RENEWABLE RANGE



 **PIRATE**  
SMART·TANKS  
Range Specs



**WARNING**  
LIFT USING ALL  
4 X LIFTING  
POINTS

**DANGER**  
NO SMOKING  
NO NAKED FLAME

**DIESEL**

  
**PIRATE**  
SMART·TANKS

**WARNING**  
LIFT USING ALL  
4 X LIFTING  
POINTS

**WARNING**  
NO WELDING  
OR DRILLING

**COMBUSTIBLE LIQUID CLASS C1**

2250 - 21C 14376